



Switch, Vivace E, 16AX, 250V, 2 gangs, with DND and PCU symbol, white

KBN32DMS_WE

Main

Range	Vivace E
Product or component type	Bell press switch
Device application	Doorbell
Device presentation	Complete product
Switch function	Bell push switch
Switch application	Do not disturb and clean up room
Colour tint	White

Complementary

Number of gangs	2 gangs
Material	PC (polycarbonate): dolly PC (polycarbonate): grid plate PC (polycarbonate): frame PC 10 % GF: actuator
Device mounting	Flush
Embedding depth	23.5 mm
Network frequency	50/60 Hz
Contacts material	Silver alloy contacts
Connections - terminals	Screw terminal
Clamping connection capacity	1.5...4 mm ² for rigid or flexible cable(s)
Clamping connection capacity	1.5...4 mm ²
Width	86 mm
Height	86 mm
Surface finish	Glossy
Number of rocker	2
surface treatment	Untreated
Rated current	16 AX
Technology type	Electromechanical
Network type	AC
[Ue] rated operational voltage	250 V
Number of terminals	6

Environment

Excluding VAT, FCA Jabal Ali & are subject to change – check with your local distributor.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	IEC 60669-1
Ambient air temperature for operation	-5...50 °C
Ambient air temperature for storage	-5...60 °C
Relative humidity	0...95 %
Operating altitude	2000 m
IP degree of protection	IP20

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.610 cm
Package 1 Width	8.600 cm
Package 1 Length	8.600 cm
Package 1 Weight	83.200 g
Unit Type of Package 2	BB1
Number of Units in Package 2	8
Package 2 Height	9.300 cm
Package 2 Width	12.500 cm
Package 2 Length	26.500 cm
Package 2 Weight	758.340 g
Unit Type of Package 3	S03
Number of Units in Package 3	72
Package 3 Height	30.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	7.935 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Total lifecycle Carbon footprint	2 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.5 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0.3 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.6 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better

 Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
Halogen-free status	Halogen free plastic parts product

Use Again

 Repack and remanufacture	
Recyclability potential, in %	3
End of life manual availability	No need of specific recycling operations
Take-back	No

Image of product / Alternate images

Alternative

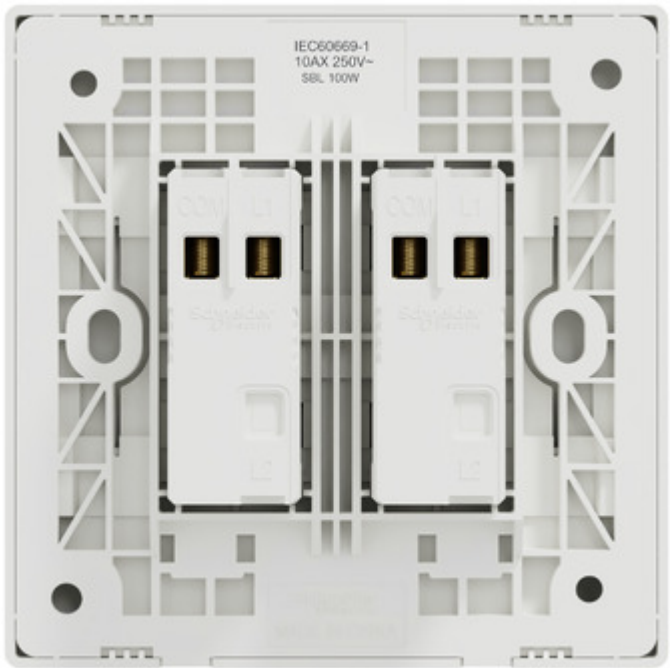








Image of product in real life situation

